

# Installation and configuration manual With hoymiles

**Pytes Lithium Battery E-BOX series** 

With hoymiles Inverter HYS-(3-6)LV-EUG1, HAS-(3-5)LV-EUG1







# **CONTENTS**

BOM LIST	3
1. Power Cable Connection	
Step.1	
Step.2	
Step.3	6
2. Communication Cable Connection	7
3. Set The DIP Switch	8
4. Start up the system	8
5.Change the battery setting of the inverter	8
Step1	9
6.System monitoring	10



# **BOM LIST**

Before installation, you should prepare following items.

Item	Remarks	Quantity
Power Cable (DC)	□ Conductor cross-section: 50 mm² to 95 mm² □ Cable diameters: 14 mm to 25 mm □ Only copper cables may be used. □ The DC cables must be sized for the maximum battery voltage and the maximum battery current (see battery manufacturer documentation).	Depends on the number of batteries and the connection method
Com. Cable	CAN communication or RS485 communication	1
Battery	48100R series /4850	Depends on the number of batteries and the connection method
Inverter	Hoymiles	1



# Notice:

1. Definition of RJ45 Port Pin for BMS is as follow.

Click here to tell the version of 48100R you have.

#### **CAN port** definition


Version of 48100R	Pin number of com. cable	
C version	Battery Inverter 12345678 12345678	

2.We have already listed by hoymiles. But please confirm that the ARM version of inverter is 0.2.18 or above. If not, please updating it before setup the whole system.

Link: Hoymiles-Compatible-Battery-List\_V1.41.pdf



#### **HOW TO INSATLL**

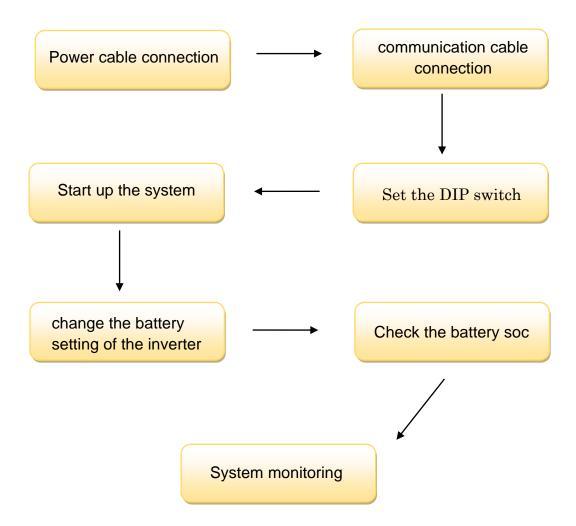


**CAUTION:** If you want to get more inverter-related settings, please refer to the inverter user manual first.



#### 1. Power Cable Connection

### Step.1

Connect the red and black cables to the inverter DC connector as shown in Pic 1.1.1.

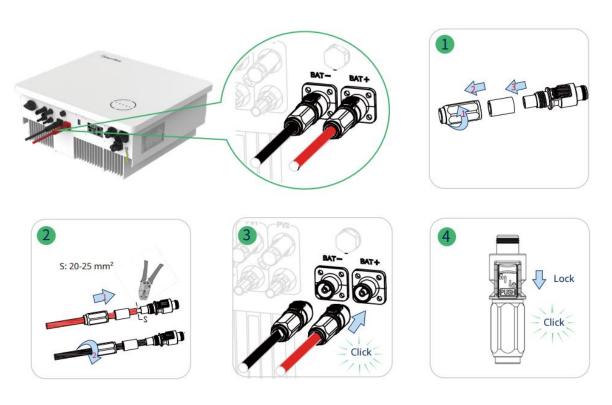

Pic 1.1.1



• Use the battery connectors in the accessory box for battery connections.

#### Step.2

At the other end of the cable, connect to the battery as shown Pic

1.1.2. (Ensure that the battery power switch is off)






Pic 1.1.2

#### 2. Communication Cable Connection

Connect the end of the cable to the inverter communication port as shown in pic 1.2.1. Make sure which communication port to use.

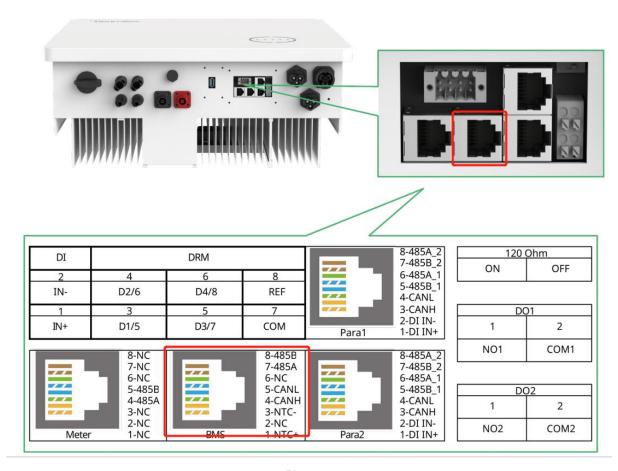

Pic 1.2.1

Connect the other end of the cable to the battery communication port as shown in pic 1.2.2. (Ensure the correct sequence of communication cable)





Pic 1.2.2

#### 3. Set The DIP Switch

Set the DIP switch as shown in Pic 1.3.1.

Version of 48100R	ADD setting		
C version	Hoymiles	888888	

Pic 1.3.1

#### 4. Start up the system

Once the unit has been properly installed and the batteries are connected well, turn on the batteries, then turn on the Battery Breaker (if have), Grid Breaker, Backup Breaker and Main breaker to power the system.

## 5.Change the battery setting of the inverter

\*CAUTION:If you want more details about the batteries settings, please check the operating manual of inverters.




#### Step1.

Log in with your account and password on S-MILES Cloud.



Pic 2.2.1

## Select Li-ion Battery and PYTES BMS protocol.

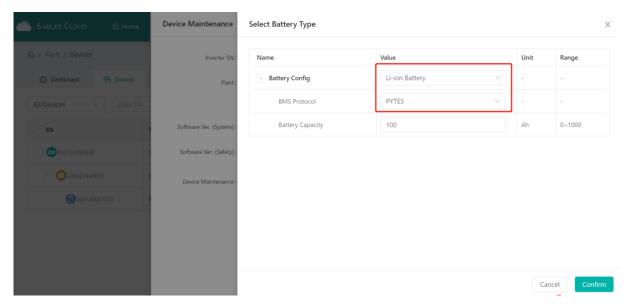

Pic 2.2.2



### 6.System monitoring

\*CAUTION:If you want more details about system monitoring, please check the operating manual of inverters.

Please download the S-Miles Cloud App from the Google Play Store or the Apple App Store. The QR code below can also be scanned to download the App. Please refer to the S-Miles Cloud User Manual from www.hoymiles.com/resources/download/ for details.

Download the app from the app store.



S-Miles Installer



S-Miles End-user

Pic 3.2.1

-END-